

DEMA

Model
PINNACLE

KITCHEN & FOOD SERVICE SOLUTIONS: WAREWASHING & DISHWASHING

Technologically Advanced Warewash Dispensing



Introducing Pinnacle, the newest family of warewash dispensers from DEMA. The Pinnacle series is the most technologically advanced warewash dispensers available. With the DEMA SmartTech app, Pinnacle is programmable through a Bluetooth connection. SmartTech offers other useful features such as a real time dashboard, program sharing, reporting, and more. Pinnacle's optional on-board programming is intuitive with a large display and easy navigation menus. With its compact design and modern appearance, Pinnacle is the ideal choice for any warewash installation.

Features & Benefits

- ◆ SmartTech app programming
- ◆ Intuitive on-board programming
- ◆ Auto switchover mode
- ◆ Color coded pumps
- ◆ Compact design
- ◆ Out of product alarm in probe and probeless modes
- ◆ Performance reporting of rack counts, concentration, and wash tank/rinse water temperature
- ◆ Prewired with main power/trigger, signal cable and probe cable
- ◆ Optional rinse and wash temperature sensors
- ◆ Models available for liquid or dry detergents and sanitizer
- ◆ Two motor and pump options
 - Large, for higher volume applications
 - Standard, for economical installations




DEMA SmartTech

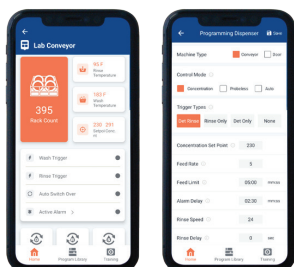

With SmartTech you can:

- Program the dispenser
- Save and share programs
- Create and share reports
- View real-time dashboards with:
 - Rack counts
 - Dispenser settings
 - Wash and rinse temperatures
 - Alarms, triggers, pump activity

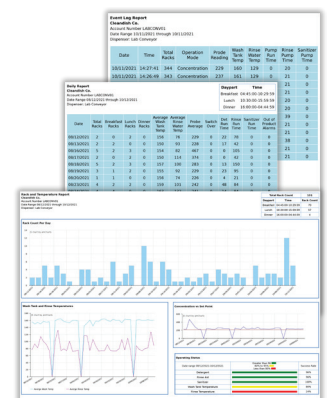

Pinnacle



P.LL.NNC



P.DL.NNC



P.LLL.NNC



P.DLL.NNC

Pinnacle Pro



PP.LL.NNC



PP.DL.NNC



PP.LLL.NNC



PP.DLL.NNC

SPECIFICATIONS

| | PINNACLE | PINNACLE PRO |
|-------------------------------|---------------------------|---------------------------|
| Main Power | 115/230 VAC 50/60 Hz 0.5A | 115/230 VAC 50/60 Hz 0.5A |
| Motor/Solenoid Rating | 24VDC | 24VDC |
| Trigger Input Voltage | 20-480 VAC 50/60 Hz | 20-480 VAC 50/60 Hz |
| Case Material | ABS | ABS |
| Environmental Temp | 32-104°F (0-40°C) | 32-104°F (0-40°C) |
| Detergent Pump Rate | 5.5 oz/min (160 ml/min) | 8.5 oz/min (250 ml/min) |
| Rinse and Sanitizer Pump Rate | 1.5 oz/min (45 ml/min) | 0.7 oz/min (20 ml/min) |


| CONFIGURATION | Pinnacle | Pinnacle Pro |
|----------------------|-----------|--------------|
| Liquid/Liquid | P.LL.NNC | PP.LL.NNC |
| Dry/Liquid | P.DL.NNC | PP.DL.NNC |
| Liquid/Liquid/Liquid | P.LLL.NNC | PP.LLL.NNC |
| Dry/Liquid/Liquid | P.DLL.NNC | PP.DLL.NNC |



CONDUCTIVITY AND WASH TEMP PROBE



RINSE TEMP PROBE

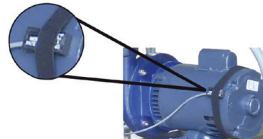

MAGNETIC FIELD SENSOR

POPULAR ACCESSORIES

PART NUMBER

| | |
|----------------------------------|----------|
| Conductivity and Wash Temp Probe | 82.60.04 |
| Rinse Temp Probe | 82.60.05 |
| Magnetic Field Sensor | 82.23.1 |



DEMA Engineering Company

10020 Big Bend Road
St. Louis, MO 63122 U.S.A
Tel: 314-966-3533
Fax: 314-965-8319



www.demaeng.com



sales@demaeng.com